


The effective medium of advertising



Alpha - A2 PIV (1.5'x2.5')

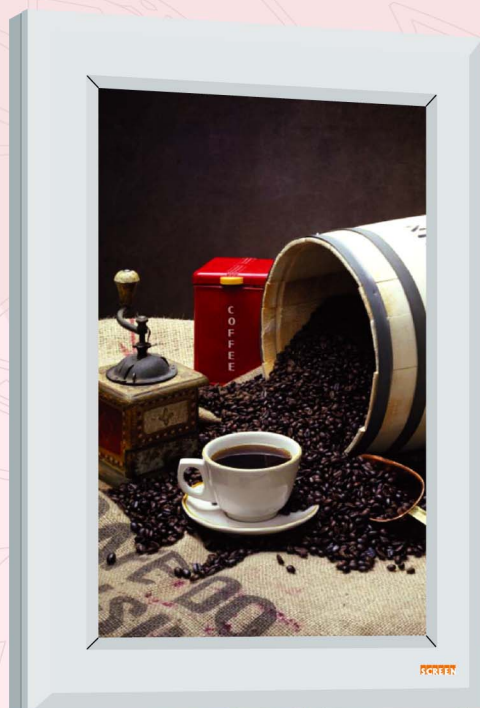

Alpha - A1 PIV (2'x3')

TECHNICAL DETAILS


MODEL	Alpha - A2 PIV 1.5' x 2.5' (Portrait)	Alpha - A1 PIV 2' x 3' (Portrait)
Dimensions		
Height	953 mm / 37.5"	1105 mm / 43.5"
Width	648 mm / 25.5"	780 mm / 30.7"
Depth	152 mm / 6"	152 mm / 6"
Height with floor stand*	1676 mm / 66"	1905 mm / 75"
Depth with floor stand	414 mm / 16.3"	483 mm / 19"
*Customize size available on quantity order.		
Weight		
Display	36 Kgs	44 Kgs
Floor Stand	16 Kgs	21 Kgs
Image Data		
Media size	445 mm x 864 mm 18" x 34"	597 mm x 1016 mm 23.5" x 40"
Viewing area	406 mm x 711 mm 16" x 28"	559 mm x 864 mm 22" x 34"
Positioning accuracy	± 5 mm	± 5 mm
Standstill interval	Variable 2 to 32 Sec	Variable 2 to 32 Sec.
Electrical specifications		
Power supply	230V AC - 50Hz ± 10% Or 110V AC-60Hz ± 10%	230V AC - 50Hz ± 10% Or 110V AC-60Hz ± 10%
Power consumption	65W	110W
Amperage	230V ± 10% / 0.50 A	230V ± 10% / 0.50 A
Environmental conditions		
Ambient temperature	10 ⁰ - 50 ⁰ C	10 ⁰ - 50 ⁰ C
Air humidity	20 - 90%	20 - 90%
Audible noise level	< 50 dB	< 50 dB

SALIENT FEATURES

- Aesthetic, Ergonomic, and Rugged Design
- Most reliable, 365 days, round the clock high performance Motion Display.
- Extremely smooth and noiseless movement.
- No film damage problem.
- Adjustable flexible viewing time.
- Weather resistance designs.
- Power Saving up to 40%.
- Available in different sizes to suit the space availability.
- High safety standards.

BENEFITS

- Eye-catching display due to continuous movement.
- Offers variety by conveying multiple messages through a single unit.
- Projects images in vibrant color with life-like clarity.
- High visibility even from a distance.
- Results in a marked increase in sales.
- Quick to install - Easy to operate - Simple to maintain.

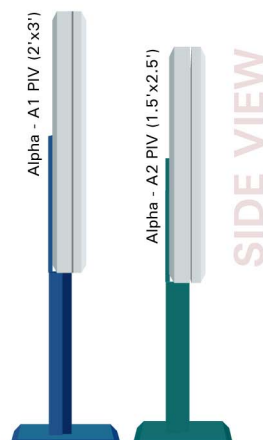

Alpha - A2 PIV, A1 PIV

POSSIBLE LOCATIONS

These sizes are most suitable for the shorter or medium viewing distance between 5 to 15 feet.

Directly at point of sale or very near to it, in departmental stores or store windows, Corporate Offices, Boutiques, Banks & ATMs, Receptions and Waiting Rooms, Hospitals, Ice-Cream Parlors, Restaurants & Hotels etc.

These sizes are also well suited for the integration into existing information systems.

MAXIMUM NUMBER OF IMAGES

10 laminated Individual Images on Carrier Web or □
15 laminated continuous images on conventional film roll.
(Maximum thickness 0.2mm - including lamination)

DIRECTION OF MOVEMENT

Vertical

PLACEMENT

Standard Floor Stand with Castors

Optional: Wall Mounting, Ceiling Mounting

CONSTRUCTION

Heavy duty metal construction, powder coated, □
4mm Transparent Acrylic
(Optional: 7mm laminated glass)

PRINT PREPARATION

Media should be backlight translit film, maximum thickness 100 micron. Best printing on high performance 6 color digital inkjet printer. Matt lamination maximum thickness 60 micron is highly recommended for protection of images against dust, dirt and scratch.

The images can be printed individually or in continuous film roll.

OPTIONAL

Remote Control

Programmable Digital Timer

*The specifications, color and dimensions of the motion display supplied may vary because of continuous development process.

SCREEN™

SCREEN PROMOTIONS PVT. LTD.

www.screenmotiondisplay.com
info@screenmotiondisplay.com
screenmotiondisplay@yahoo.com

Mobile : + 91-98250 31293
+ 91-93242 29636 (Mumbai)
Phone : + 91-79-2642 1635 / 1636
Fax : + 91-79-2646 4199

3, Malhar House, 1st Floor, B/h Ratnam Complex,
Nr. Nikumbh Building, C.G. Road,
Ahmedabad 380006, INDIA